

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 721 234 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:

10.07.1996 Bulletin 1996/28

(51) Int. Cl.<sup>6</sup>: H01R 13/08

(21) Application number: 95203353.8

(22) Date of filing: 05.12.1995

(84) Designated Contracting States:

DE FR GB

(30) Priority: 09.01.1995 US 369949

(71) Applicant: GENERAL MOTORS CORPORATION  
Detroit Michigan 48202 (US)

(72) Inventors:

- Gladd, Joseph Howard  
Cortland, Ohio 44410 (US)

- Felix, Steven Dale  
Russiaville, Indiana 46979 (US)
- Fink, Randy Lynn  
Warren, Ohio 44483 (US)

(74) Representative: Denton, Michael John et al  
Patent Section  
1st Floor  
Gideon House  
28 Chapel Street  
Luton Bedfordshire LU1 2SE (GB)

## (54) Connector assembly having double ended shorting clip

(57) An electrical connector assembly has a pair of mating connector housings carrying mating metal terminals, a double ended shorting clip carried by one of the housings and having both ends thereof in spring biased engagement with its associated metal terminals in that housing and a connector position assurance member. The shorting clip first has one end automatically disengaged from its associated metal terminals by a first cam

when the connector housings are mated together and then its other end automatically disengaged from its associated terminals by a second cam on the connector position assurance member when connected to the mated housings so that a shorting path across the associated metal terminals is only fully disconnected if proper mating of the connector housings is assured.

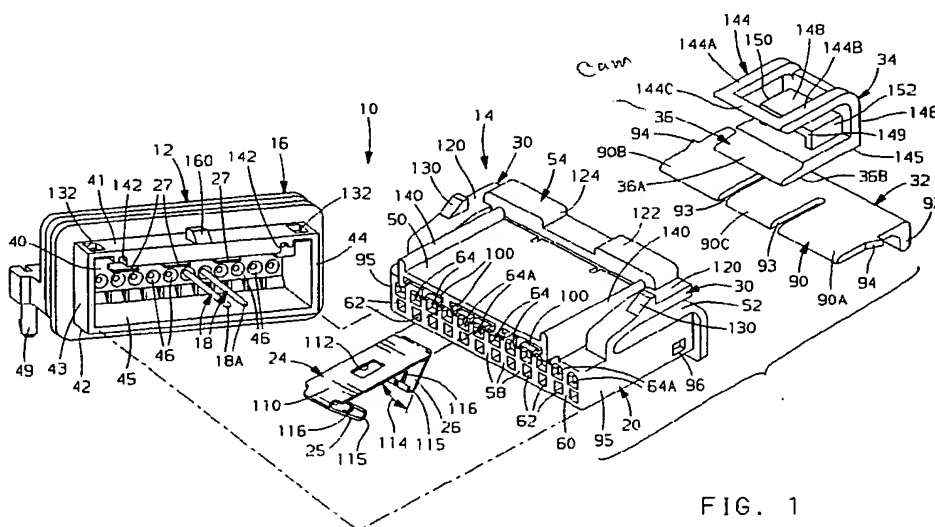


FIG. 1

## Description

The present invention relates to an electrical connector assembly having a shorting clip, and, in particular, to an electrical connector assembly comprising a pair of mating connector subassemblies and in which a double ended shorting clip is first automatically disengaged at one end from its associated metal terminals in one of the connector subassemblies to break a first shorting path when the mating connector subassemblies are connected together and thereafter is automatically disconnected at its other end from the associated metal terminals to break a second shorting path by a connector position assurance member so that the second shorting path across the metal terminals cannot be disconnected unless the mating connector subassemblies have been properly connected together.

In the handling of electrically energizable charges or igniters, it is common practice to provide a short across the wires or leads connected to the charge or igniter prior to the usage thereof. The short eliminates the possibility of static electricity or RF interference from generating a current flow or voltage drop across the leads which could produce premature accidental actuation of the charge or igniter. It is also known to employ an electrical connector means comprising mating connector subassemblies in which one has a shorting means in the form of a spring clip which is self biased toward a position in which it engages its associated terminals to provide a bussing shunt across the terminals when the connector subassemblies are disconnected and in which the other connector subassembly includes a cam means which engages the spring biased shorting clip to automatically disengage the shorting clip from its associated terminals subsequent to the mating terminals of the connector subassemblies engaging one another. In this arrangement the respective terminals of the connector subassemblies are first engaged with each other prior to the cam means of other connector subassembly disengaging the shorting means from its associated terminals of the one connector subassembly. Such an arrangement is shown in U.S. Patent No. 3,869,191, which patent is assigned to the same assignee as the present invention.

The present invention provides a new and improved electrical connector assembly of the above-noted type. Although the electrical connector assembly of the present invention could be used in various applications wherein it is desired to automatically provide for bussing of terminals of a connector assembly connected to an electrically energizable device when its two mating subassemblies are disconnected, it is particularly susceptible for use with an inflatable cushion restraint system having a squib for igniting a charge to burst a diaphragm for controlling communication between a pressure vessel and an inflatable bag and/or having an electrical igniter means for energizing gas generators located within the pressure vessel.

The novel connector assembly of the present invention when used in an inflatable cushion restraint system

has one connector subassembly provided with a shorting means for bussing its associated terminals. This connector subassembly is adapted to be electrically connected via conductors to a squib for a charge and/or electrically energizing igniter means for a gas generator or generators. The other connector subassembly is connected in a circuit with a controller or control means including sensor switches for actuating the restraint system when predetermined conditions are present. The provision of the shorting clips for bussing the various terminals of its associated connector subassembly enables the various components of the air cushion restraint system to be assembled in an automotive vehicle without any premature or accidental actuation of the system due to static electricity, RF interference, etc.

It is also common practice in the art to provide a connector position assurance member to make sure that two mating connector subassemblies or housings have been properly mated together. The connector position assurance member cannot be connected to the mated connector subassemblies or housings if they are not properly mated or they are disconnected. It can only be secured to the two subassemblies if they are properly mated.

Accordingly, an important feature of the present invention is to provide a new and improved electrical connector assembly of the above noted type and in which the shorting means carried by one of the connector subassemblies is in the form of a shorting spring clip which is self biased toward a position in which it engages its associated terminals so as to automatically provide for bussing across the terminals when the connector subassemblies are disconnected, and in which the connector assembly includes a connector position assurance member for assuring that the connector subassemblies have been properly mated together and in which the connector position assurance member includes a cam means thereon which engages the shorting clip to automatically disengage the shorting clip from its associated terminals only if the connector subassemblies have been properly mated or connected together.

Another more specific feature of the present invention is to provide a new and improved electrical connector assembly comprising a pair of mating connector housings having a plurality of spaced metal terminals therein which are adapted to mate with each other when the connector subassemblies are connected together, and in which one of the connector subassemblies includes a shorting clip having spring fingers at its opposite ends which are self biased toward a position in which they engage associated metal terminals at two spaced locations thereon when the connector subassemblies are disconnected to provide two shorting paths thereacross to prevent premature accidental actuation of an electrically actuated device operatively connected with the terminals and in which the other of the connector subassemblies includes a cam means which functions to move the spring fingers at one end of the shorting clip in opposition to its self biasing force to disengage it from

its associated terminals subsequent to the mating terminals of the connector subassemblies engaging one another. The connector assembly further includes a connector position assurance member slidable on one of the connector subassemblies and connectable to the other subassembly for assuring that the subassemblies have been properly mated together and in which the connector position assurance member also includes a cam means for engaging the other fingers at the other end of the shorting clip to disengage them from the associated metal terminals when being slid and then connected to the other connector subassembly whereby the connector position assurance member provides the dual function of assuring that the mating connector subassemblies have been properly mated together and ensures that the shorting clip will not be disengaged from its associated terminals unless the connector subassemblies have been properly mated together.

The advantages of the novel electrical connector assembly of the present invention are that it is of a relatively economical and simple construction, that the connector subassemblies can be readily, properly connected together, that their proper connection can be assured, and that the dual bussing paths cannot be interrupted until the connector subassemblies of the connector assembly have been properly mated together.

The present invention further resides in various novel constructions and arrangement of parts, and further objects, novel characteristics and advantages of the present invention will be apparent to those skilled in the art to which it relates and from the following detailed description of the illustrated, preferred embodiment thereof made with reference to the accompanying drawings forming a part of this specification and in which similar reference numerals are employed to designate corresponding parts throughout the several views, and in which:

Figure 1 is an exploded perspective view of most of the parts of the novel electrical connector assembly of the present invention;

Figure 2 is an enlarged axial cross sectional view of certain parts of the novel electrical connector assembly shown in Figure 1;

Figure 3 is an enlarged axial cross sectional view like that shown in Figure 2, but showing the parts connected to one another; and

Figure 4 is an enlarged axial cross sectional view like that shown in Figure 3, but showing all of the parts of the connector assembly connected together.

Referring to the drawings, the novel electrical connector assembly 10 of the present invention comprises, in general, a pair of mating connector subassemblies 12 and 14. The connector subassembly 12 comprises a male insulator housing 16 which carries a plurality of laterally spaced, cylindrical, male pin terminals 18 therein. The connector subassembly 14 comprises a female

insulator housing 20 for carrying a plurality of laterally spaced female socket terminals 22 therein. The female connector assembly 14 also carries a shorting clip 24 having pairs of spring fingers 25, 26 which are self biased towards a position in which they engage the adjacent female terminals 22 at spaced longitudinal locations to provide a pair of shunting paths thereacross when the connector assemblies 12, 14 are disconnected from one another. The male connector housing 16 has a cam means 27 which functions to engage the fingers 25 of the shorting clip 24 to disengage them from the female terminals 22 subsequent to the female terminals 22 engaging the male terminals 18 when the connector housings 16, 20 are connected together. The connector subassemblies 12, 14 are retained in their mated or engaged position, as shown in Figure 3, by a latching means 30.

The connector assembly 10 also includes a terminal position assurance member (TPA) 32 which is slidably connected to the female insulator housing 20 for assuring that the female terminals 22 are all properly seated or positioned within the insulator housing 20 and a connector position assurance member (CPA) 34 for assuring that the connector subassemblies 12, 14 have been properly connected together. The connector position assurance member (CPA) 34 includes a cam means 36 which is engageable with the spring fingers 26 of the shorting clip 24 to disengage the same from their associated adjacent female terminals 22 when it is locked to the connector subassembly 12, as shown in Figure 4. The connector position assurance member 34 serves the dual purpose of assuring that the mating connector subassemblies 12, 14 have been properly connected together and for assuring that the shorting path or circuit across the terminals 22 cannot be broken unless the mating connector assemblies 12, 14 have been properly connected together.

The male insulator housing or body 16 of the connector subassembly 12 is made from a suitable dielectric material, preferably plastic, and is of a generally rectangular shape. The insulator housing 16 is in the form of a header housing having an end wall 40, a top wall 41, a bottom wall 42 and a pair of side walls 43, 44, which together define a central cavity 45. The end wall 40 has a plurality of laterally spaced through openings 46 for receiving the male pin terminals 18. The male pin terminals 18 (only one of which is shown in Figures 2-4) are aligned in a row and have forward end portions 18A which project into the cavity 45 and have rearward end portions 18B which are bent at right angles to the forward portions 18A and which extend through openings 47 on a printed circuit board 48. The end portions 18B are adapted to be connected or soldered to printed circuit traces (not shown) on the printed circuit board 48. The male pin terminals 18 are retained within the end wall 40 of the insulator housing 16 via a press fit and in a manner conventional in the art. The male insulator housing 16 also includes a pair of barbed projections 49 integral with but located rearwardly of the end wall 40. The projections

49 are snap fittingly pushed through suitable openings (not shown) in the printed circuit board 48 to attach the insulator housing 16 to the printed circuit board 48. Alternately, the housing 16 could have a pair of legs which could be bolted to the printed circuit board.

The male insulator housing 16 also includes the forwardly projecting cam means 27 in the form of three laterally spaced cams which are integral with the end wall 40 and project in a direction parallel to the forward portions 18A of the male pin terminals 18, the cams 27 extending within the cavity 45, as shown in Figure 2. The cams 27 also have a tapered upper surface, as indicated at 27A, to define a cam whose thickness progressively decreases from its end adjacent the end wall 40 towards its free end, as shown in Figure 2.

The connector subassembly 14 comprises the insulated connector housing 20 which is made from a suitable dielectric material, such as plastic, and is of a generally rectangular shape complementary to that of the connector subassembly 12. The female connector housing 20 has a main or forward body portion 50, a rearward deck portion 52 and a pump handle latch member 54. The forward body portion 50 has a plurality of laterally spaced cavities or longitudinally extending openings 56 therethrough for receiving the female terminals 22. The cavities 56 have a planar bottom 57 and are separated from each other by vertically extending walls 58 which extend from a forward end wall 60 at the forward body portion 50 to the deck portion 52. The walls 58 along a rearward section of the forward body portion 50 are spaced from the bottom 57 of the cavities 56 so that the cavities 56 all communicate with a rectangularly shaped cavity 59 extending across a rearward section of the forward body portion 50 of the housing 20 at its bottom 57. The cavity 59 is adapted to slidably receive the terminal position assurance member 32, as will be hereinafter more fully described. The forward end wall 60 includes pairs of vertically spaced openings 62, 64 therein which are aligned with and in communication with the cavities 56. The openings 64 have a tapered entry end 64A.

The longitudinally extending cavities 56 are adapted to receive the female socket terminals 22. The female socket terminals 22 could be of any suitable or conventional construction, but are preferably of the type shown and described in U.S. Patent No. 4,448,477, issued May 15, 1984, and assigned to the same assignee as the present invention. Since resort may be had to the aforementioned patent No. 4,448,477 for a complete description of the female socket terminals 22, the socket terminals 22 will only be herein described to the extent necessary for an understanding of the present invention.

The socket terminals 22 have an elongated resilient socket 70 at one end and a conductor attachment 72 at its other end comprising conventional conductor core and insulation crimp barrels for attachment to the core and insulation of a suitable cable or insulated conductor 74. The socket 70 comprises a pair of axially spaced, split tubes 75, 76 which are joined by a circumferentially spaced array of juxtaposed spring strips 78. The split

tubes 75, 76 are rectangular in shape and the circumferential array of juxtaposed spring strips 78 consists of four spring strips which are integral at each end with their respective sides of the rectangularly shaped split tubes 75, 76. The spring strips 78 taper inwardly from each end, as shown in Figure 2, to provide contacts at their narrowest width 78A for biasingly engaging the cylindrical pin terminals 18 which are adapted to be inserted therein, as in a manner to be hereinafter more fully described. The socket terminal 22 further includes a retaining means comprising a U-shaped guard 80 and a resilient latch tang 82. The U-shaped guard has axially spaced legs 80A, 80B which are integral with the respective split tubes 75, 76 and the resilient latch tang 82 is integral with one end to the leg 80A of the U-shape guard 80 and extends generally axially of the elongated resilient socket 70. The socket terminals 22 are connected to the insulator body by inserting the same into the cavities 56 from right to left, as viewed in Figure 2. The leg portions 80A and 80B of the U-shaped guard 80 slide along the bottom walls 57 of the cavities 56. The latch tang 82 is adapted to engage an abutment 83 integral with and extending transversely of the vertical wall 58 into the cavity 56 and be deflected until the female terminal 22 is moved all the way into engagement with the forward end wall 60 whereupon the latch tang 82 will return to its normal free state position and latch behind the abutment 83 to prevent reverse movement of the socket terminal 22. The socket terminal 22 engages the forward end wall 60 to prevent over-insertion of the same into the cavity 56. The reason for the provisions of the openings 62 is to allow a suitable tool to be inserted through the openings 62 to unlatch the latch tang 82 should a need arise for the terminal 22 to be replaced. Also in this position, the socket 70 of each socket terminal 22 is aligned with the upper opening 64 to receive a mating pin 18 when connected to the connector housing 12.

When all the female socket terminals 22 have been connected to the insulator housing 20, the terminal position assurance member 32 is employed to assure that each of the terminals 22 has been properly located within its respective cavity 56. The terminal position assurance member 32 comprises a flat plastic member 90 having a downwardly extending flange 92 at one end so as to enable the same to be manually grasped. In addition, the member 90 includes a pair of laterally spaced slots 93 and has a laterally extending latch or ramp 94 at each of its sides. The terminal position assurance member 32 is slidably received in the cavity 59 between the bottom edge of the walls 58 and the bottom wall 57 of the housing 20, and with the forward end of the terminal position assurance member 32 engaging the rearward legs 80B of the terminals 22 to assure that they have all been properly positioned within the cavities 56 and connected to the housing 20. The latches 94 are adapted to engage the interior sides of the side walls 95 of the forward portion 50 of the connector housing 20 until they are located adjacent a pair of openings 96 in the side walls 95. As

best shown in Figure 1, the flat member 90 of the terminal position assurance member 32 at its right and left end portions 90A, 90B is deflectable toward the center portion 90C thereof due to the provision of the slots 93 so as to enable the same to be slid within the front portion 50 of the insulator housing 20 until the latches 94 are aligned with the openings 96 whereupon, due to the inherent resiliency of the end portions 90A, 90B, they spring back to their normal free state position and snap into place within the openings 96.

The insulator body 20 also houses the shorting clip 24 which is adapted to engage the axially split tubes 75, 76 of adjacent terminals 22 when the insulator body 20 is disconnected from the insulator body 16 of the connector subassembly 12. To this end, the insulator body 20 has three laterally spaced cavities 100 extending axially therethrough and which are located directly above the cavities 56 containing the female socket terminals 22. Although only one shorting clip 24 is shown in the drawings and described herein, up to three shorting clips 24 could be employed, one for each cavity 100. The cavities 100 have a planar upper inner wall surface 102 extending the full axial length of the main or forward body portion 50 and are in communication with and adjacent a pair of the cavities 56 located therebeneath via slots 104. The upper wall 102 of each of the cavities 100 also includes an integral downwardly extending tapered nib or protrusion 108 which extends laterally inwardly into the cavity 100.

As best shown in Figures 1 and 2, the shorting clip 24 is double ended and includes a planar main or bridge portion 110 having a central cut out 112. A shorting clip 24 also includes pairs of spring fingers 25, 26 which are integral with the bridge portion 110 at its opposite forward and rearward ends, or left and right ends, as viewed in the drawings. The fingers 25, 26 are reversely bent or curled underneath the bridge portion 110 and extend towards each other. The spring fingers 25, 26 form an acute included angle 114 with the bridge portion 110 and they have curled ends 115. The spring fingers 25, 26 of each pair are separated by slots 116 to provide a pair of laterally spaced fingers 25, 26, as best shown in Figure 1. The slots 116 receive a common vertical wall 58 between the adjacent cavities 56 and allows the curled ends 115 of the spring fingers 25, 26 and to extend downwardly into the adjacent cavities 56 to engage the axially split tubes 75, 76 of the female socket terminal 22 located therein. The spring fingers 25, 26 of each pair of spring fingers thus engages adjacent terminals 22 located in adjacent cavities 56 to provide a shunt across the adjacent terminals 22 when the subassembly 14 is disconnected from the subassembly 12.

The shorting clip 24 is connected to the female connector housing 20 by inserting the same from left to right, as viewed in Figures 2-4 of the drawings. When the shorting clip 24 is inserted into the cavity 100, the bridge portion 110 will engage the inwardly extending nib 108 and be deflected downwardly toward the female terminal 22. During this movement, first the spring fingers 26 and

then the spring fingers 25 will engage the female terminal 22 and ride thereover. Engagement between the spring fingers 25, 26 and the female terminal 22 will cause a spring biasing force to be exerted against the bridge portion 110 as it is being slid over the nib 108. When the cut out 112 in the shorting clip 24 is aligned with the nib 108, the biasing force of the spring fingers 25, 26 will move the bridge portion 110 into engagement with the planar inner wall 102 of the insulator housing 20 and the shorting clip will be locked against reverse movement. When the shorting clip 24 is connected to the insulator housing 20, the curled ends 115 of each pair of spring fingers 25, 26 will engage the axially split tubes 75, 76 of adjacent female terminals 22 to provide a dual shunt across the adjacent pair of terminals 22 to prevent premature actuation of the restraint system.

The pump handle latch member 54 is integral with the connector housing 20 and includes a pair of spaced, rearwardly extending arms 120 and a transversely extending bridge or handle portion 122. The arms 120 are integrally formed at their forward ends to the main or forward body portion 50 of the housing 20 and extend upwardly and rearwardly of the housing 20 in cantilever fashion. The bridge portion 122 is integral with the arms 120 at their rearward ends, as viewed in Figure 1. The bridge portion 122 can be manually engaged to depress the latch member 54 toward the housing 20 in opposition to its inherent, resilient self biasing force tending to bias the same to the position shown in Figure 1, which is its normal free state position. The bridge portion 122 has a central recess 124 on its upper side and has an underside 126 which is spaced from the rear deck 52 of the insulator housing, and for reasons to be hereinafter more fully described. The latch arms 120 also include an upwardly extending tapered latch 130 to enable it to be latched in a catch 132 in the connector housing 16. The catches 132 comprise a pair of laterally spaced openings in the upper wall 41 of the insulator housing 16. In addition, the insulator housing 20 includes a pair of laterally spaced, axially and upwardly extending ribs 140 which are adapted to be received within a pair of axially extending grooves 142 in the upper wall 41 of the connector housing 16 to guide the insulator housing 20 into the insulator housing 16 when being connected thereto and to prevent upside down or improper insertion of the connector housing 20 into the connector housing 16.

When the terminals 22 have all been assembled to the female insulator housing 20, the terminal position assurance member 32 has been inserted into the housing 20 and behind the terminals 22 to ensure that they have all been properly seated within the insulator housing 20, and the shorting clips 24 have been inserted into the cavities 100 in the connector housing 20 and seated therein, the connector subassembly 14 can then be connected to the connector subassembly 12. This is accomplished by inserting the main or forward body portion 50 of the insulator housing 20 into the cavity 45 of the insulator housing 16. The insulator housing 20 can only be inserted if it is properly oriented relative to the insulator

housing 16 due to the provision of the ribs 140 which have to be slidably received within the grooves 142 in the insulator housing 16. As the insulator housing 20 is slid into the insulator housing 16, the tapered latches 130 will engage the upper wall 41 of the insulator housing 16 and cause the arms 120 to be deflected downwardly until the latches 130 are aligned with the openings 132 in the housing 16 whereupon the latch member 54, due to its inherent resiliency, will return toward its normal free state position, and the latches 130 will be received within the openings 132 to lock the insulator housing 20 to the insulator housing 16. To disconnect the housing 20 from the housing 16, the latch member 54 can be depressed to disengage the latches 130 from the openings 132 and the housings 16, 20 then pulled apart.

Also, as the connector housings 16, 20 are being connected together, the pin terminals 18 will be guided via the tapered entry ends 64A through the openings 64 in the end wall 60 of the connector body 20 and be received in the socket terminals 22. The pin terminals 18 deflect and biasingly engage the strips 78 of the socket terminals 22 when received therein.

It should further be noted at this point that the insulator housing 16 includes the three laterally spaced cam members 27 which project inwardly into the cavity 45 from the end wall 40 thereof and which are aligned with the cavities 100 in the insulator housing 20. The cam members 27 are tapered, as indicated by reference numeral 27A, so as to have progressively decreasing thickness preceding from the wall 40 to their free ends. The purpose of each of the cam members 27 is that as the connector housing 20 is connected to the connector housing 16, it will engage beneath the ends 115 of the spring fingers 25 and cause the spring fingers 25 to be deflected upwardly in opposition to their self biasing forces and be disengaged from the split tubes 75 of the adjacent terminals 22, as shown in Figure 3. However, while the cam 27 disengages the spring fingers 25 from the split tubes 75, note that the spring fingers 26 still remain in engagement with the split tubes 76 of the terminals 22 to continue a shunt across adjacently located terminals 22.

To prevent the latch member 54 from being depressed and the connector subassembly 14 from being disconnected from the connector subassembly 12 and to ensure that they have been properly mated or connected together, a connector position assurance member (CPA) 34 is provided. The connector position assurance member 34 is generally U-shaped, and has spaced upper and lower planar sides 144, 145 and an intermediate bottom or bight 146. The upper side 144 is deflectable and is bifurcated to define a pair of laterally spaced arms 144A, 144B integral at one end with the bight 146 and having a transversely extending bridge 144C at its other or free end. The other side 145 has an integral forwardly extending tapered cam means or cam projection 36 whose thickness progressively decreases from its end integral with the side 145 to its free end 36A. The cam projection 36 has a planar bottom side 36B.

The connector position assurance member 34 also has an inverted U-shaped abutment 148 integral with the inner side wall surfaces of the bight 146 and the lower side 145. The abutment 148 defines a forwardly facing stop surface 149 and a pair of side rails 150, 152.

The connector position assurance member 34 is adapted to be connected to the connected subassemblies 12, 14 by sliding the same axially along the top of the deck 52 of the housing 20 of the subassembly 14 from right to left, as viewed in Figures 3 and 4. As the member 34 is slid, the bridge 144C of the top side 144 will pass through the recess 124 of the latch member 54 and engage a tapered latch 160 extending upwardly and outwardly of the top wall 41 on the housing 16. The tapered latch 160 causes the side 144 to be deflected upwardly until the bridge 144C clears the latch 160 whereupon the side 144, due to its inherent resiliency will return toward its normal free state position and have its bridge 144C lock behind the latch 160, as shown in Figure 4. The recess 124 prevents lateral shifting of the member 34. When the connector position assurance member 34 is slid from right to left on the insulator body 20, the lower side 145 and the abutment 148 will be received beneath the bridge portion 122 of the deflectable latch member 54. This prevents the latch member 54 from being deflected downwardly to disengage the latches 130 from the catches 132. If the latch member 54 is not in its normal free state position and properly latched to the connector housing 16, it will be deflected downwardly toward the deck 52 and the forward stop surface 149 of the abutment 148 will engage the bridge portion 122 and prevent the connector position assurance member 34 from being connectable to the latch 160 of the insulator housing 16.

Further, during the sliding movement of the connector position assurance member 34, the cam 36 performs an important function in that it engages the spring fingers 26 of the shorting clip 24 and causes the same to be disengaged from their associated split tubes 76 of the adjacent female terminals 22, as shown in Figure 4. It should thus be apparent that the connector position assurance member 34 provides the dual function of assuring that the connector housing 20 or subassembly 14 has been properly connected or mated to the connector housing 16 or subassembly 12 so that the spring fingers 25 of the shorting clip 24 are disengaged from their associated female socket terminals 22 and to provide the additional function of lifting spring fingers 26 from the same associated terminals 22 only if it can be latched to the insulator housing 16 of the subassembly 12. This absolutely ensures that an accidental actuation of a restraint system cannot occur until the connector subassemblies 12, 14 are properly connected to each other and until the connector position assurance member has been properly connected to the connector subassembly 12.

Although the illustrated embodiment hereof has been described in great detail, it should be apparent that certain modifications, changes and adaptations may be



made in the illustrated embodiment, and that it is intended to cover all such modifications, changes and adaptations which come within the spirit of the present invention.

## Claims

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

### 1. An electrical connector assembly comprising:

a first insulator housing having a plurality of first spaced apart cavities therein, a first plurality of metal terminals housed in said first cavities, a second cavity in said first insulator housing which is laterally spaced from said first cavities, said first insulator housing having slot means for communicating said first and second cavities, a spring clip housed within said second cavity, said spring clip having a bridge portion extending transversely of the second cavity and a plurality of spaced resilient fingers extending transversely of the bridge portion through the slot means and overlying respective ones of the first terminals, said fingers each having an end portion which is engaged with one of the first plurality of terminals to provide a shorting path between the first plurality of terminals, said spring clip when disposed in the second cavity being self-biased toward a position in which the end portions of the fingers engage the respective ones of the first plurality of terminals, a second insulator housing which is matable with the first insulator housing, said second insulator housing having a plurality of spaced openings therein, a second plurality of metal terminals carried by said second insulator housing and extending through said openings of said second insulator housing which are adapted to mate with the first plurality of terminals in the first insulator housing when the second insulator housing is mated to the first insulator housing, cooperable means on said first and second insulator housings to latch said first and second insulator housings together when they are fully mated to each other,

a connector position assurance member guided for linear sliding movement on one of said first and second insulator housings and being lockable to the other of said first and second insulator housings if the first and second insulator housings and their respective terminals have been properly mated together, said connector position assurance member upon being slid being engageable with the other said first and second insulator housings and not lockable thereto if the first and second insulator housings are not properly mated, and

cam means on said connector position assurance member for engaging said fingers of said spring clip and moving said fingers out of engagement with said first plurality of metal terminals to

interrupt said shorting path when being lockably connected to said other of said first and second insulator housings whereby said connector position assurance member functions both to assure that the first and second insulator housings and their respective terminals have been properly mated and to prevent disengagement of the spring clip from said first plurality of terminals until the connector position assurance member has assured that the first and second insulator housings have been properly connected together.

### 2. An electrical connector assembly comprising:

a first insulator housing having a plurality of first spaced apart cavities therein, a first plurality of metal terminals housed in said first cavities, a second cavity in said first insulator housing which is laterally spaced from said first cavities, said insulator housing having slots through a wall common with said first and second cavities for communicating said second cavity with said first cavities, a shorting spring clip housed within said second cavity, said shorting spring clip having a flat bridge portion extending transversely of the second cavity and a pair of spaced, resilient fingers at opposite ends of the bridge portion which extend transversely from the bridge portion through said slots and overlie respective ones of the first terminals, each pair of said fingers engaging said respective ones of said first plurality of terminals to provide a double shorting path between said respective ones of said first plurality of terminals, each pair of said fingers of said shorting spring clip when disposed in the second cavity being self-biased toward a position in which their end portions engage said respective ones of said first plurality of terminals, a second insulator housing which is matable with the first insulator housing, said second insulator housing having a plurality of spaced openings therein, a second plurality of metal terminals carried by said second insulator housing and extending through said openings in said second insulator housing which are adapted to mate with the first plurality of terminals in the first insulator housing, said second insulator housing having a cam means intermediate its ends, said insulator housings when being connected together causing said first and second plurality of terminals to matingly engage each other and then causing said cam means on said second insulator housing to engage one pair of the spring fingers at one end of the shorting spring clip to move said one pair of spring fingers in opposition to their self-biasing forces to disengage said one pair of spring fingers of the shorting spring clip from the first plurality of terminals, cooperable means on said first and second insulator housings to latch said first and second insulator housings together when they are fully mated to each other,

a connector position assurance member sli-

dable on said first insulator housing and being connectable to said second insulator housing if the two insulator housings are properly mated together, said connector position assurance member engaging a stop on said first insulator housing and not being connectable thereto if said first and second insulator housings are not properly mated, said connector position assurance member having a second cam means for engaging the other pair of said spring fingers of the shorting spring clip to move said other pair of spring fingers in opposition to their self-biasing forces to disengage the other pair of spring fingers of the shorting spring clip from the first plurality of terminals whereby the connector position assurance member functions both to assure that the first and second insulator bodies and their respective terminals have been properly mated and to prevent disengagement of the other pair of fingers of the spring clip from said first plurality of terminals until the connector position assurance member has assured that the first and second insulator housings have been properly connected together.

3. An electrical connector assembly comprising:

a first insulator housing having a plurality of first spaced apart cavities therein, a first plurality of metal terminals housed in said first cavities, a second cavity in said first insulator housing which is laterally spaced from said first cavities, said insulator housing having slots through a wall common with said first and second cavities for communicating said second cavity with said first cavities, a shorting spring clip housed within said second cavity, said shorting spring clip having a flat bridge portion extending transversely of the second cavity and a pair of spaced, resilient fingers at opposite ends of the bridge portion which extend transversely from the bridge portion through said slots and overlie respective ones of the first terminals, each pair of said fingers engaging said respective ones of said first plurality of terminals to provide a double shorting path between said respective ones of said first plurality of terminals, each pair of said fingers of said shorting spring clip when disposed in the second cavity being self-biased toward a position in which their end portions engage said respective ones of said first plurality of terminals, a second insulator housing which is matable with the first insulator housing, said second insulator housing having a plurality of spaced openings therein, a second plurality of metal terminals carried by said second insulator housing and extending through said openings in said second insulator housing which are adapted to mate with the first plurality of terminals in the first insulator housing, said second insulator housing having a cam means intermediate its ends, said insulator housings when being connected together causing said first and second plurality of terminals to matingly engage each other and then causing

said cam means on said second insulator housing to engage one pair of the spring fingers at one end of the shorting spring clip to move said one pair of spring fingers in opposition to their self-biasing forces to disengage said one pair of spring fingers of the shorting spring clip from the respective ones of first plurality of terminals, cooperable means on said first and second insulator housings to latch said first and second insulator housings together when they are fully mated to each other, said cooperable means including a deflectable pump handle latch member on said first insulator housing which is deflectable to allow latches on the latch member to lock into openings in the second insulator housing when the housings are mated together,

a connector position assurance member slidable on said first insulator housing and being connectable to said second insulator housing if the two insulator housings are properly mated together, said connector position assurance member engaging a stop on said latch member of said first insulator housing and not being connectable thereto if said first and second insulator housings are not properly mated, said connector position assurance member having a second cam means for engaging the other pair of said spring fingers of the shorting spring clip to move said other pair of spring fingers in opposition to their self-biasing forces to disengage the other pair of spring fingers of the shorting spring clip from the first plurality of terminals whereby the connector position assurance member functions both to assure that the first and second insulator bodies and their respective terminals have been properly mated and to prevent disengagement of the other pair of fingers of the shorting spring clip from said respective ones of said first plurality of terminals until the connector position assurance member has assured that the first and second insulator housings have been properly connected together,

said connector position assurance member having spaced sides, one of said sides being deflectable and latchable to a projection on the second connector housing and the other of said sides having said cam means and an abutment which is slidable beneath said pump handle latch member if the first and second insulator housings are properly mated together, said abutment on said other side of said connector position assurance member engaging said pump handle latch member to prevent said connector position assurance member from latching to said projection on said second insulator housing if the first and second insulator housings are not properly mated together.

4. An electrical connector assembly, as defined in claim 3, and wherein said one side of said connector position assurance member slides through a recess in the pump handle latch member.

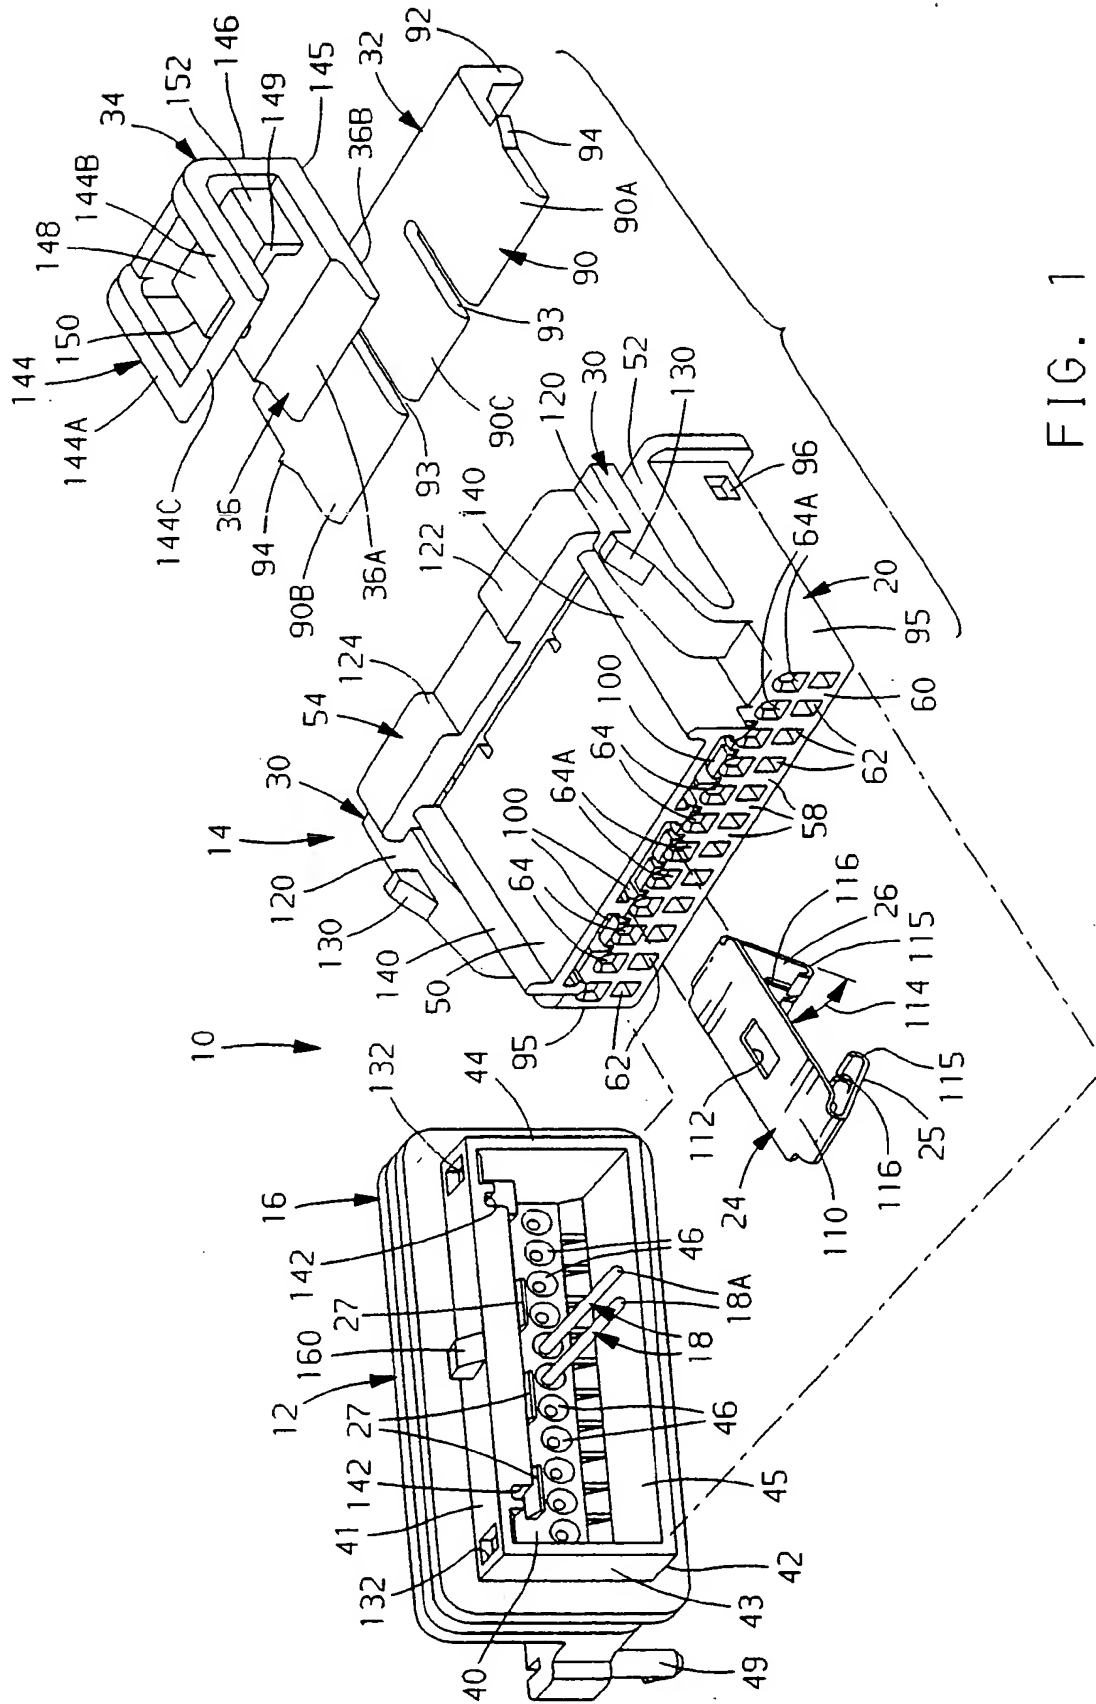


FIG. 1

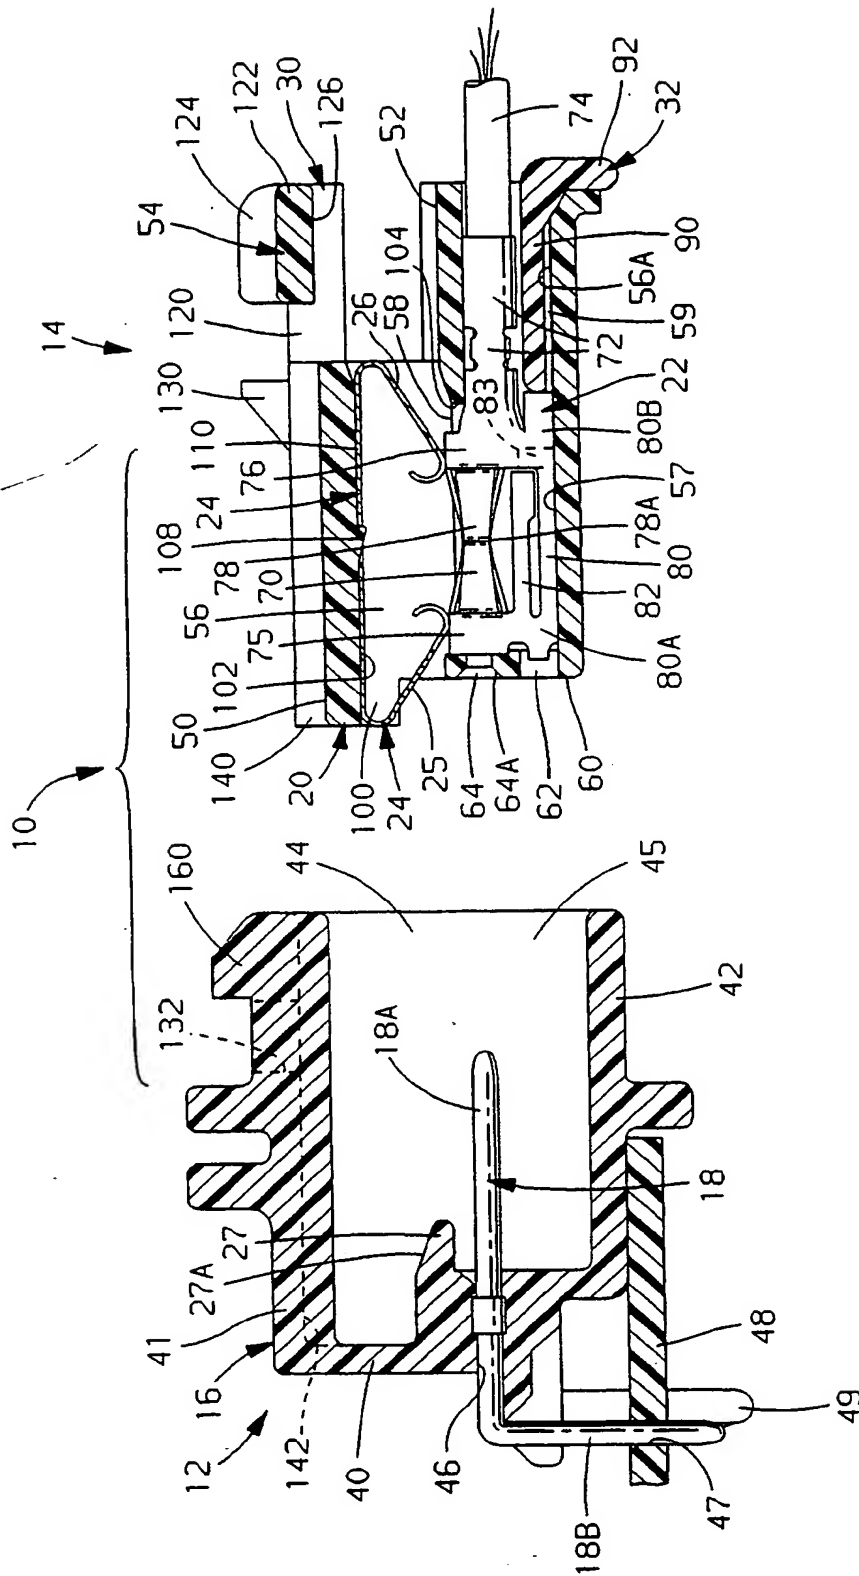


FIG. 2

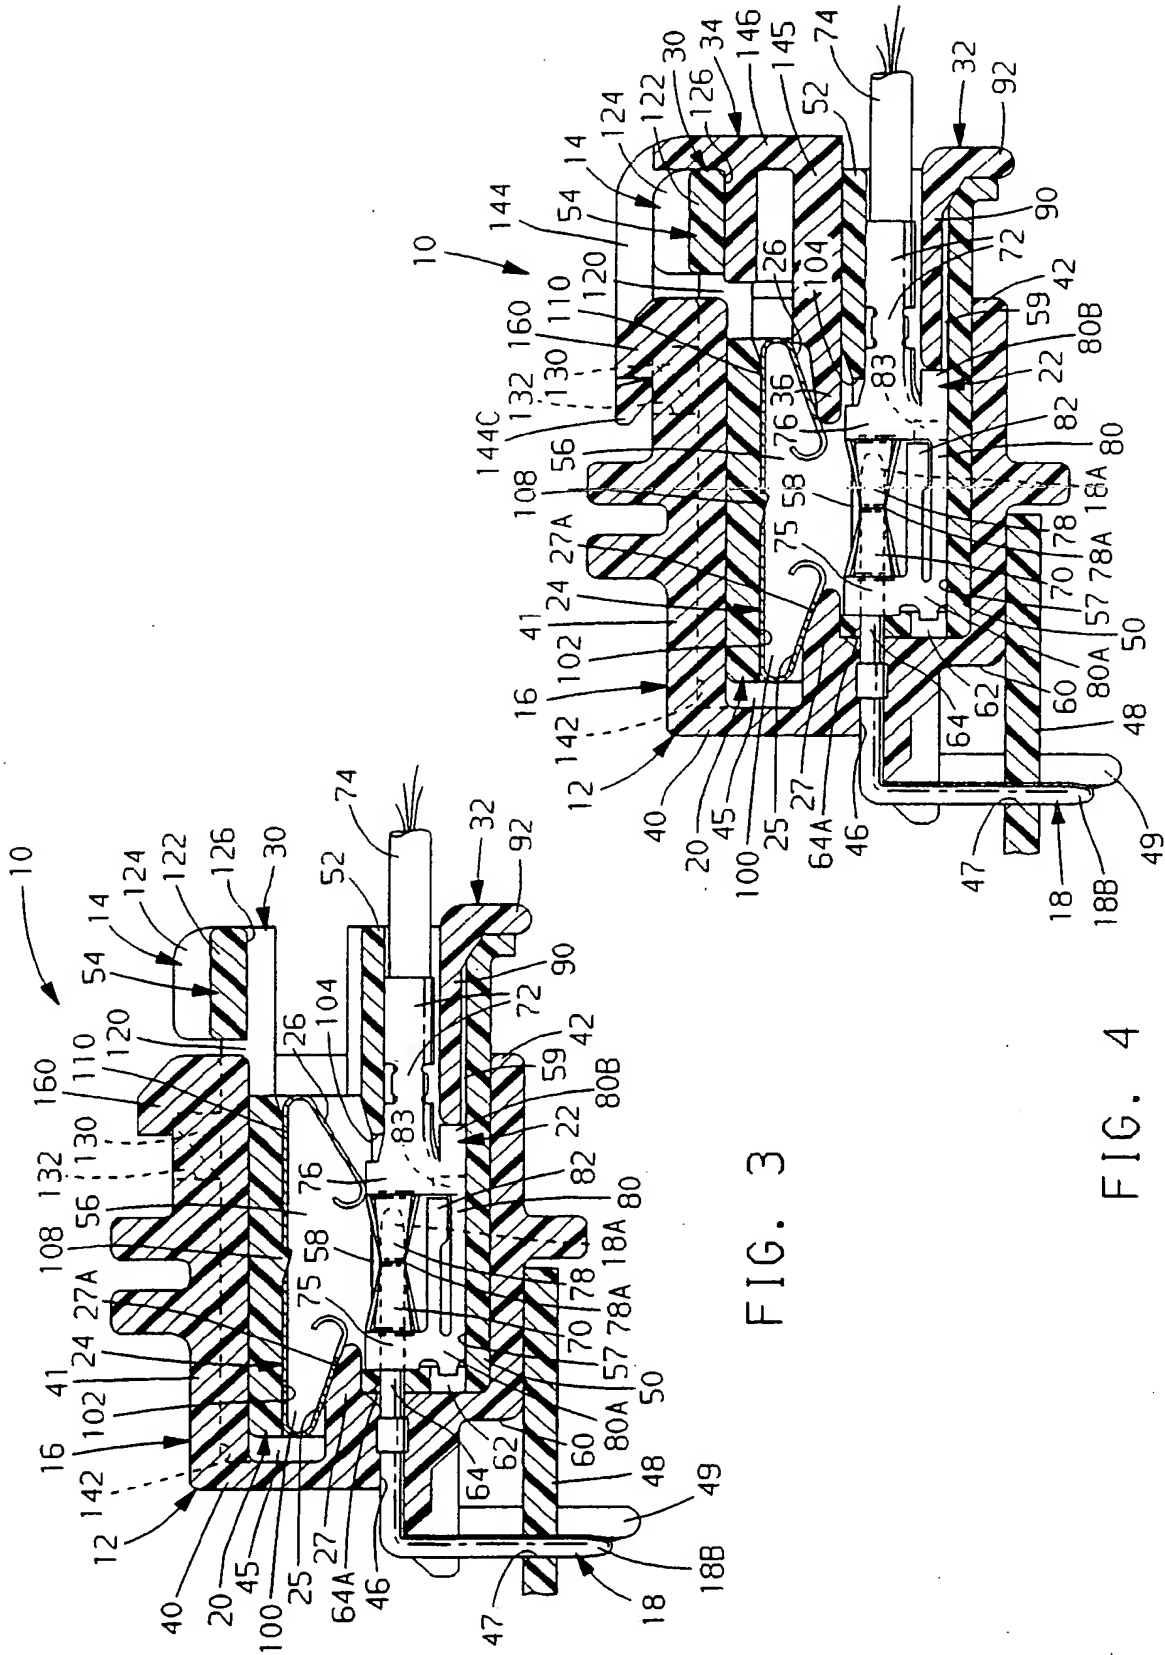


FIG. 3

FIG. 4



(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 721 234 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
21.04.1999 Bulletin 1999/16

(51) Int. Cl.<sup>6</sup>: H01R 13/08, H01R 13/629,  
H01R 13/703

(43) Date of publication A2:  
10.07.1996 Bulletin 1996/28

(21) Application number: 95203353.8

(22) Date of filing: 05.12.1995

(84) Designated Contracting States:  
DE FR GB

(30) Priority: 09.01.1995 US 369949

(71) Applicant:  
GENERAL MOTORS CORPORATION  
Detroit Michigan 48202 (US)

(72) Inventors:  
• Gladd, Joseph Howard  
Cortland, Ohio 44410 (US)

• Felix, Steven Dale  
Russiaville, Indiana 46979 (US)  
• Fink, Randy Lynn  
Warren, Ohio 44483 (US)

(74) Representative:  
Denton, Michael John et al  
Delphi Automotive Systems  
Centre Technique Paris  
117 avenue des Nations  
B.P. 60059  
95972 Roissy Charles de Gaulle Cedex (FR)

### (54) Connector assembly having double ended shorting clip

(57) An electrical connector assembly has a pair of mating connector housings carrying mating metal terminals, a double ended shorting clip carried by one of the housings and having both ends thereof in spring biased engagement with its associated metal terminals in that housing and a connector position assurance member. The shorting clip first has one end automatically disengaged from its associated metal terminals by a first cam

when the connector housings are mated together and then its other end automatically disengaged from its associated terminals by a second cam on the connector position assurance member when connected to the mated housings so that a shorting path across the associated metal terminals is only fully disconnected if proper mating of the connector housings is assured.

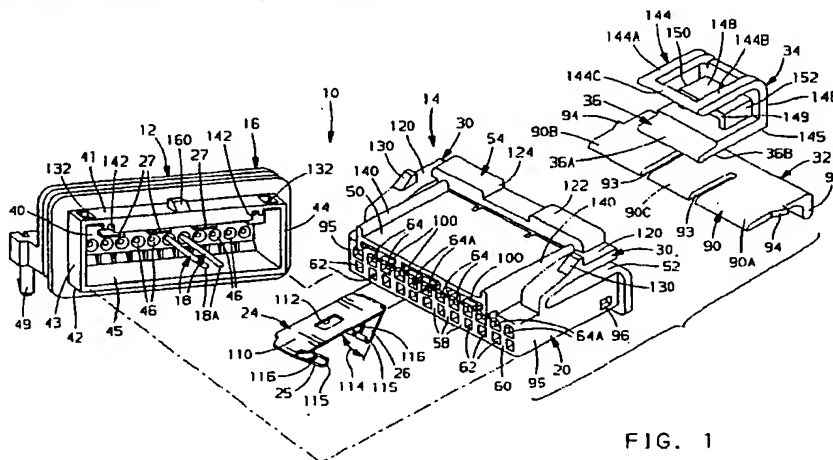


FIG. 1



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 95 20 3353

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	US 5 263 872 A (MARPOE JR GARY R ET AL) 23 November 1993 * abstract; claims 1-8; figures * ---	1-4	H01R13/08 H01R13/629 H01R13/703
A	US 4 786 258 A (SHAFFER HOWARD R ET AL) 22 November 1988 * abstract; claims; figures 4A-4C * ---	1-4	
A	US 4 850 888 A (DENLINGER KEITH R ET AL) 25 July 1989 * abstract; claims; figures * ---	1-4	
A	US 5 295 846 A (SUMIDA TATSUYA ET AL) 22 March 1994 * abstract; claims; figures * ---	1-4	
A,D	US 3 869 191 A (TOLNAR JR EMIL J ET AL) 4 March 1975 * the whole document * -----	1-4	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			H01R
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 2 March 1999	Examiner Durand, F
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 95 20 3353

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-03-1999

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5263872	A	23-11-1993	NONE		
US 4786258	A	22-11-1988	DE	3851120 D	22-09-1994
			DE	3851120 T	23-03-1995
			EP	0314716 A	10-05-1989
			JP	6036384 B	11-05-1994
			JP	1503183 T	26-10-1989
			WO	8809070 A	17-11-1988
US 4850888	A	25-07-1989	JP	2103881 A	16-04-1990
			JP	2706309 B	28-01-1998
			KR	9402141 Y	06-04-1994
US 5295846	A	22-03-1994	JP	2671691 B	29-10-1997
			JP	5190233 A	30-07-1993
			DE	69302588 D	20-06-1996
			DE	69302588 T	12-09-1996
			EP	0551128 A	14-07-1993
US 3869191	A	04-03-1975	CA	1006242 A	01-03-1977

**THIS PAGE BLANK (USPTO)**